


All rights are strictly reserved. Reproduction or disclosure to third parties in any form whatever is not permitted without written authorization from the proprietor. A violation is punishable.

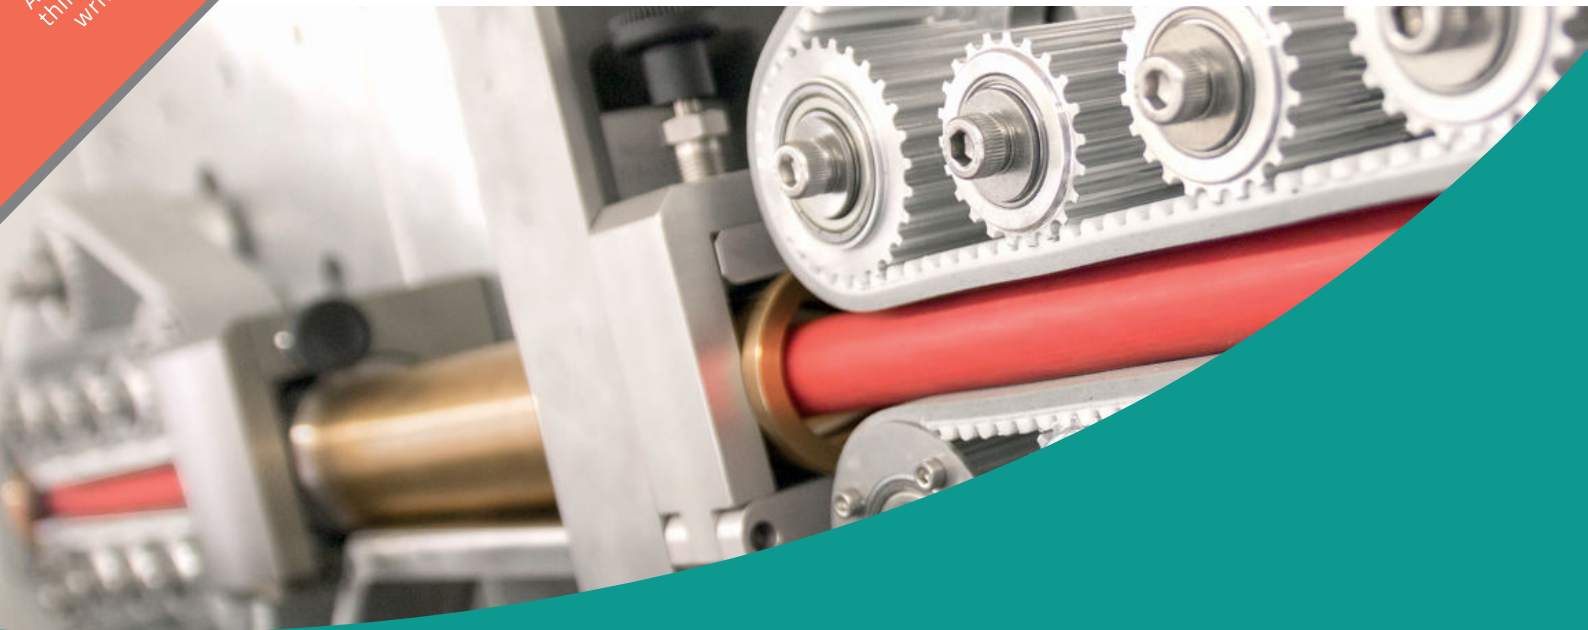

CUT & STRIP TAGLIA & SPELA


70 mm²

20 mm


AM 3800

CUT & STRIP

Max. cable outer diameter 20 mm
 Diametro massimo del cavo

Max. cable length 75 mm ~ 999 m
 Lunghezza massima del cavo

Wire size range stranded / solid 0.5 - 70 mm² / 0.5 - 16 mm²
 Sezione cavo multi-trefolo / unipolare

Feeding speed 180 m/min
 Velocità trascinalimento cavo

Pull-off length max. 1st / 2nd side 210 mm / 140 mm
 Spelatura massima 1°/2° lato

Power supply 230 V, 50/60 Hz, 2 A
 Alimentazione elettrica

Pneumatic supply 6 bar
 Alimentazione pneumatica

Weight 100 Kg
 Peso

Dimensions (LxWxH) 649 x 846 x 485 mm
 Dimensioni (LxPxH)

Various PC / SPS - interface for printers, peripherals and network
 Varie PC/SPS – interfaccia per stampanti, per periferiche e di rete

FEATURES

Double-blade system®
 Sistema di taglio a doppia lama

V blade in HSS
 Lama a V in acciaio super rapido

Outstanding cutting force
 Forza di taglio elevata


High productivity
 Alta produttività

One operation – two processes
 Processo di taglio e spelatura (anche intermittente) eseguita in un'unica operazione

Belt or roller feeds
 Trascinamento a nastro o a rulli

Movable guides for safe disposal of removed insulation material
 Guide mobili per la raccolta del materiale rimosso

Ease of use and integration Industry 4.0 functionality
 Facilità d'uso e integrazione software industria 4.0

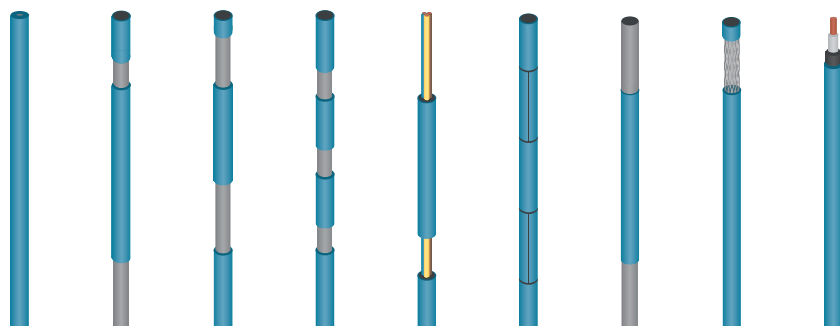

All Pictures shown are for illustration purpose only. Specifications are subject to change without notice

Le immagini sono inserite a scopo illustrativo. I prodotti possono subire modifiche.



ELECTRONIC
ELECTROMECHANICAL
COMPONENTS
PARTNER & DEALER



Via Monferrato, 43
20098 San Giuliano Milanese
I T A L Y

T. +39 02 55.60.61.01
F. +39 02 55.60.71.43

www.klemi-contact.com