


All rights are strictly reserved. Reproduction or disclosure to third parties in any form whatever is not permitted without written authorization from the proprietor. A violation is punishable.



CUT & STRIP TAGLIA & SPELA

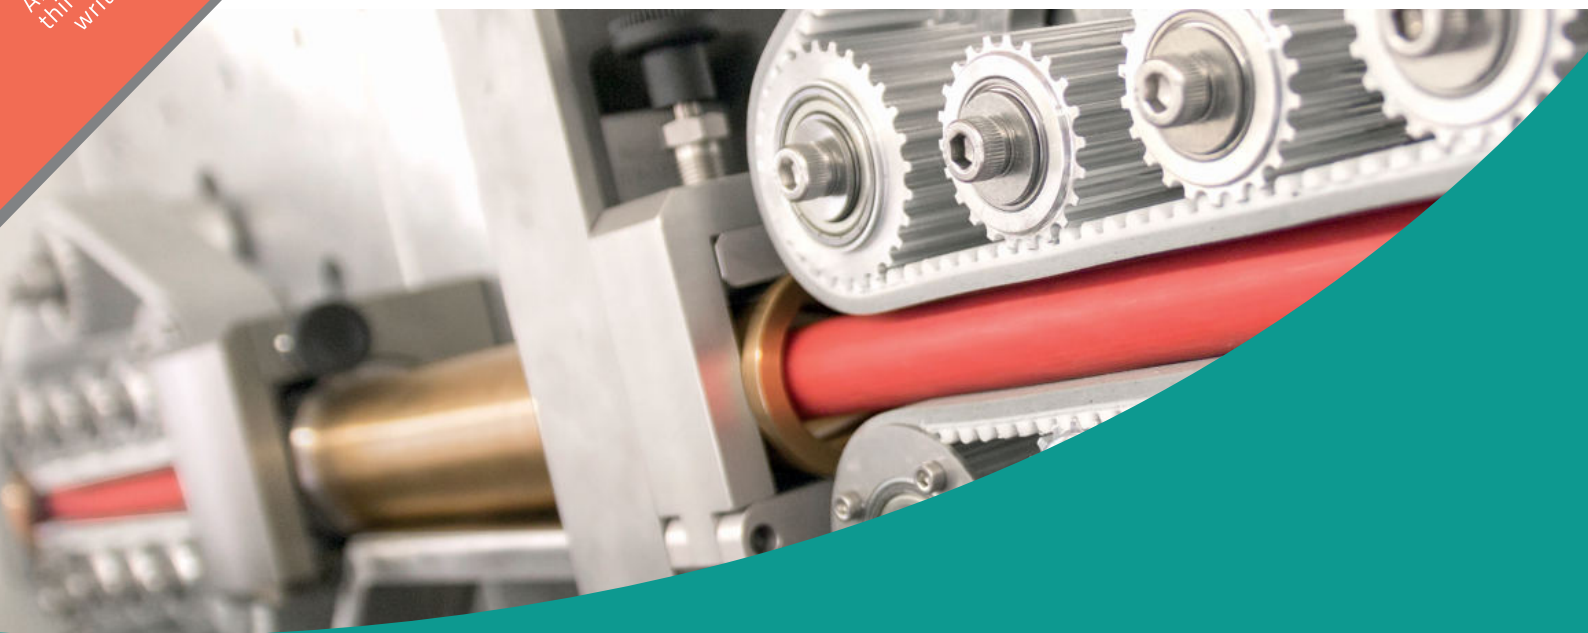

185 mm²

35 mm

AM 5800

CUT & STRIP

Max. cable outer diameter Diametro massimo del cavo	35 mm
Max. cable length Lunghezza massima del cavo	100 mm – 999 m
Wire size range stranded / solid Sezione cavo multi-trefolo / unipolare	1.5 - 185 mm ² / 1.5 - 16 mm ²
Feeding speed Velocità trascinamento cavo	150 m/min
Pull-off length max. 1st / 2nd side Spell. max. 1/2	270 - 450 mm / 90 - 270 mm
Power source Motore	Three-phase stepper motor Motore trifase passo passo
Power supply Alimentazione elettrica	3~400 V, 50/60 Hz, 2.6 A
Weight Peso	180 Kg
Dimensions (LxWxH) Dimensioni (LxPxH)	930 x 857 x 710 mm
Various Varie	PC / SPS - System monitoring interface for printers, peripherals and network PC/SPS – Monitoraggio del sistema, interfaccia per stampanti, per periferiche e di rete

FEATURES

Double-blade system®
Sistema di taglio a doppia lama

V blade in HSS
Lama a V in acciaio super rapido


Outstanding cutting force
Forza di taglio elevata

High productivity
Alta produttività

One operation – two processes
Processo di taglio e spelatura (anche intermittente) eseguita in un'unica operazione

Automatic cut-to-length and multi-stage stripping
Taglio longitudinale e spelatura multi fase automatici

Intelligent contact pressure for optimal material handling
Sistema adattivo gestione di trascinamento del cavo

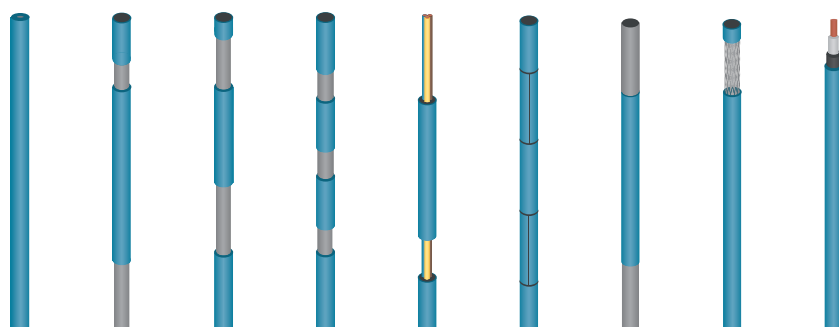

All Pictures shown are for illustration purpose only. Specifications are subject to change without notice

Le immagini sono inserite a scopo illustrativo. I prodotti possono subire modifiche.



ELECTRONIC
ELECTROMECHANICAL
COMPONENTS
PARTNER & DEALER



Via Monferrato, 43
20098 San Giuliano Milanese
I T A L Y

T. +39 02 55.60.61.01
F. +39 02 55.60.71.43

www.klemi-contact.com