


All rights are strictly reserved. Reproduction or disclosure to third parties in any form whatever is not permitted without written authorization from the proprietor. A violation is punishable.

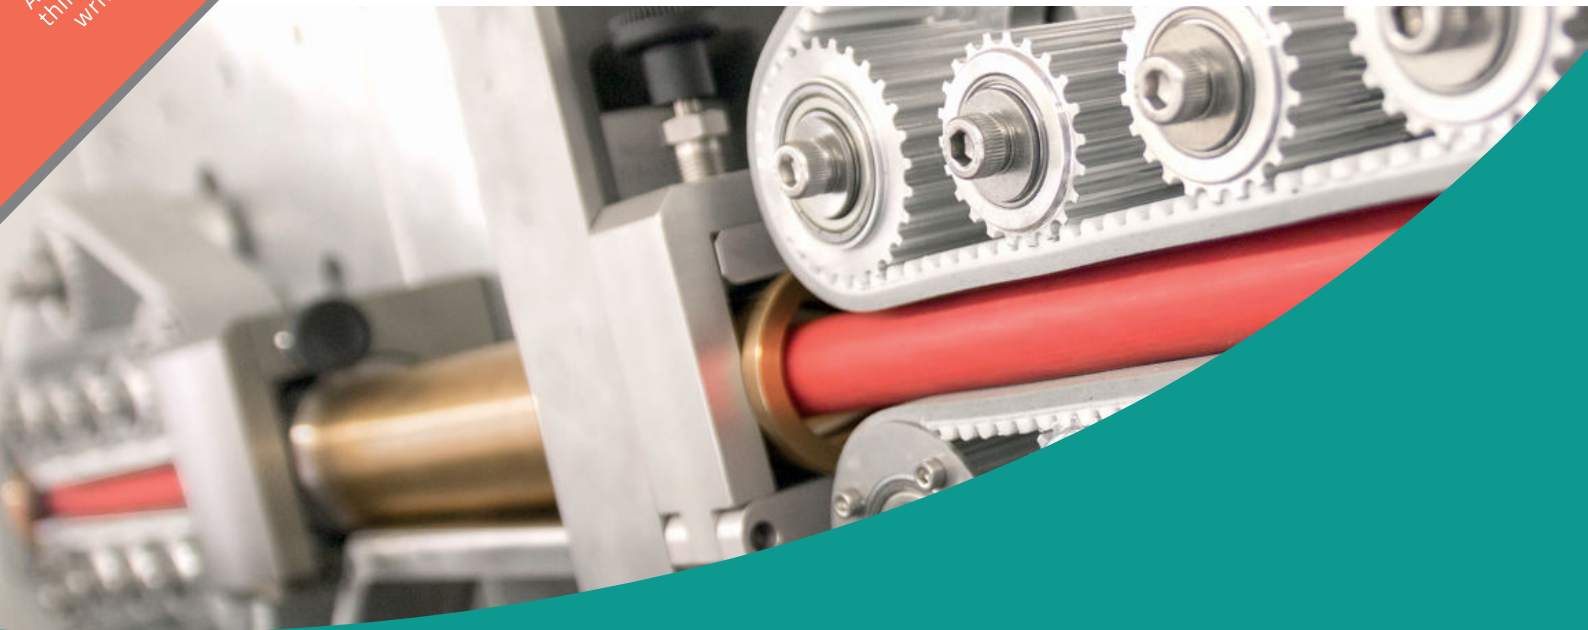

CUT & STRIP TAGLIA & SPELA

240mm²

35 mm



AM 5800 HD

CUT & STRIP

Max. cable outer diameter
Diametro massimo del cavo 35 mm

Max. cable length
Lunghezza massima del cavo 100 mm – 999 m

Wire size range stranded / solid
Sezione cavo multi-trefolo / unipolare 1.5 - 240 mm² / 1.5 - 16 mm²

Feeding speed
Velocità trascinamento cavo 150 m/min

Pull-off length max. 1st / 2nd side
Spell. max. 1/2 270 - 450 mm / 90 - 270 mm


Power source
Motore Three-phase stepper motor
Motore trifase passo passo

Power supply
Alimentazione elettrica 3~400 V, 50/60 Hz, 2.6 A

Weight
Peso 200 Kg

Dimensions (LxWxH)
Dimensioni (LxPxH) 930 x 857 x 710 mm

Various PC / SPS - System monitoring interface for printers, peripherals and network
Varie PC/SPS - Monitoraggio del sistema, interfaccia per stampanti, per periferiche e di rete

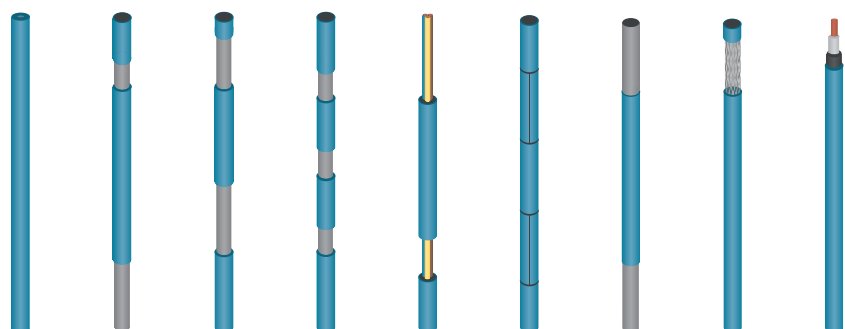

FEATURES

Higher performance than the AM 5300 model (cable workable up to 240 mm²)
Prestazioni superiori (cavo lavorabile fino a 240 mm²) rispetto al modello AM 5300

Double-blade system®
Sistema di taglio a doppia lama

V blade in HSS
Lama a V in acciaio super rapido

Outstanding cutting force
Forza di taglio elevata

High productivity
Alta produttività

One operation – two processes
Processo di taglio e spelatura (anche intermittente) eseguita in un'unica operazione

Automatic cut-to-length and multi-stage stripping
Taglio longitudinale e spelatura multi fase automatici

Intelligent contact pressure for optimal material handling
Sistema adattivo gestione di trascinamento del cavo

All Pictures shown are for illustration purpose only. Specifications are subject to change without notice

Le immagini sono inserite a scopo illustrativo. I prodotti possono subire modifiche.



ELECTRONIC
ELECTROMECHANICAL
COMPONENTS
PARTNER & DEALER



Via Monferrato, 43
20098 San Giuliano Milanese
I T A L Y

T. +39 02 55.60.61.01
F. +39 02 55.60.71.43

www.klemi-contact.com