


All rights are strictly reserved. Reproduction or disclosure to third parties in any form whatever is not permitted without written authorization from the proprietor. A violation is punishable.



## **CUT & STRIP** TAGLIA & SPELA

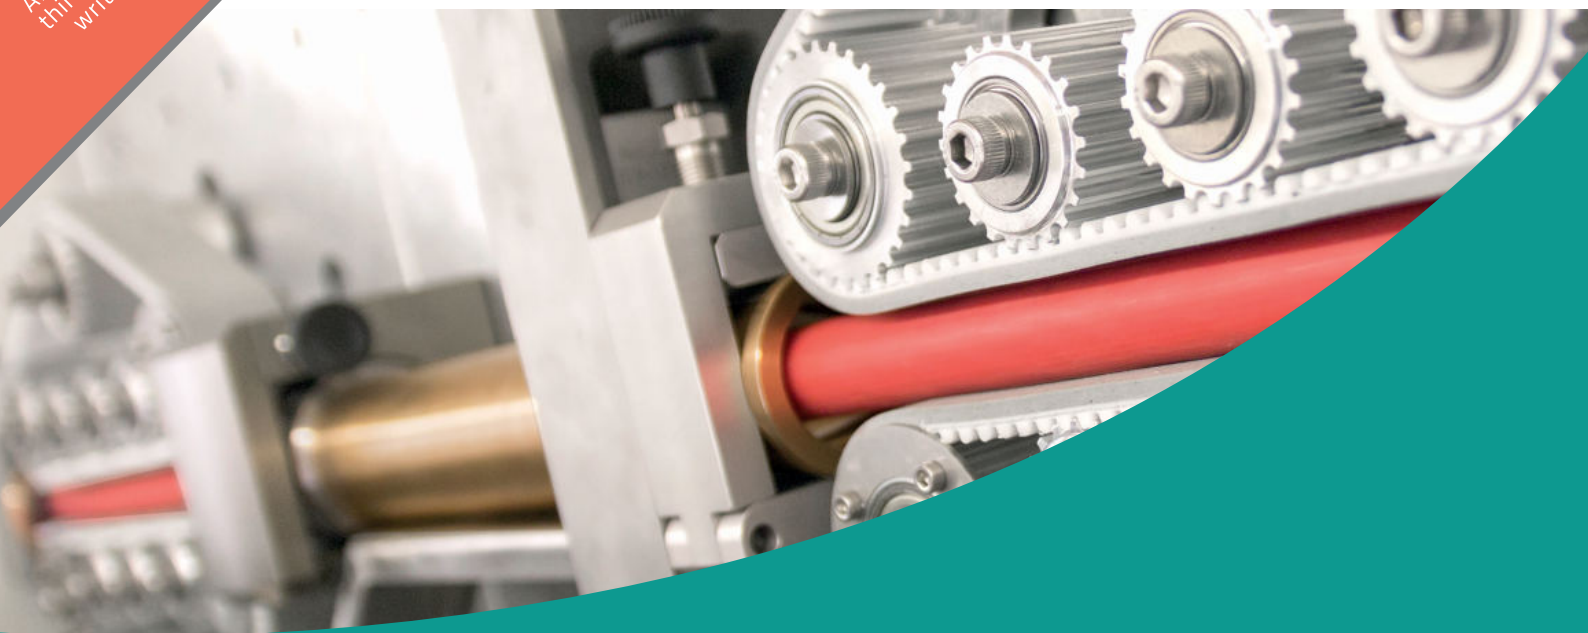

# AM 5850

## CUT & STRIP with Rotary Cutting Module

|                                                                                    |                                                                                                                           |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| <b>Max. cable outer diameter</b><br>Diametro massimo del cavo                      | 20 mm                                                                                                                     |
| <b>Cable length</b><br>Lunghezza del cavo                                          | 75 mm - 999 m                                                                                                             |
| <b>Cable size range stranded / solid</b><br>Sezione cavo multi-trefolo / unipolare | 0.5 - 70 mm² / 0.5 - 10 mm²                                                                                               |
| <b>Feeding speed</b><br>Velocità trascinamento cavo                                | 180 m/min                                                                                                                 |
| <b>Pull-off length max. 1st / 2nd side</b><br>Spelatura massima 1°/2° lato         | 210 mm / 110 mm                                                                                                           |
| <b>Power supply</b><br>Alimentazione elettrica                                     | 230 V, 50/60 Hz, 2 A                                                                                                      |
| <b>Pneumatic supply</b><br>Alimentazione pneumatica                                | 6 bar                                                                                                                     |
| <b>Weight</b><br>Peso                                                              | 130 Kg                                                                                                                    |
| <b>Dimensions (LxWxH)</b><br>Dimensioni (LxPxH)                                    | 885 x 849 x 485 mm                                                                                                        |
| <b>Various</b><br>Varie                                                            | PC/SPS - interface for printers, peripherals and network<br>PC/SPS – interfaccia per stampanti, per periferiche e di rete |

## FEATURES

**Double-blade system® and rotary cut for processing cables up to 70 mm²**  
Sistema a doppia lama e taglio rotativo per cavi fino a 70 mm²


**Outstanding cutting force**  
Forza di taglio elevata

**High productivity & high-precision rotary cut**  
Alta produttività e taglio rotativo ad alta precisione

**Belt feeds**  
Trascinamento a nastro

**One operation – two processes**  
Processo di taglio e spelatura (anche intermittente) eseguita in un'unica operazione

**Ease of use and integration Industry 4.0 functionality**  
Facilità d'uso e integrazione software industria 4.0

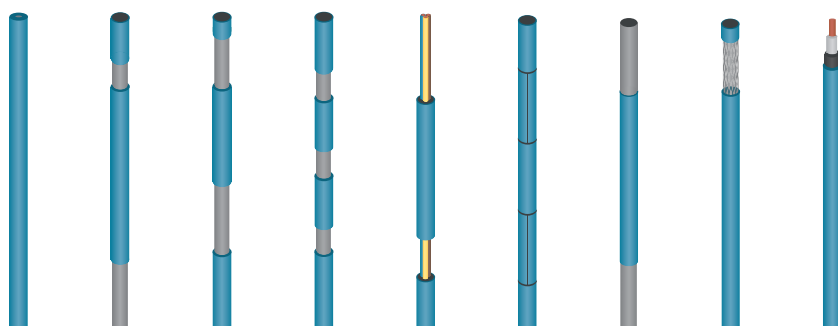

All Pictures shown are for illustration purpose only. Specifications are subject to change without notice

Le immagini sono inserite a scopo illustrativo. I prodotti possono subire modifiche.



ELECTRONIC  
ELECTROMECHANICAL  
COMPONENTS  
PARTNER & DEALER



Via Monferrato, 43  
20098 San Giuliano Milanese  
I T A L Y

T. +39 02 55.60.61.01  
F. +39 02 55.60.71.43

[www.klemi-contact.com](http://www.klemi-contact.com)