


All rights are strictly reserved. Reproduction or disclosure to third parties in any form whatever is not permitted without written authorization from the proprietor. A violation is punishable.



Klemi Contact
The connectables

FUSE & FUSEHOLDER

341.300

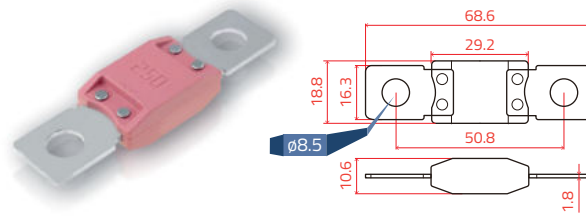

ISO 8820-3

Vibration class compliant with ISO 16750-3 test IV
Classe di vibrazione conforme alla norma ISO 16750-3 test IV



200 pz. - 500 pz. - 5000 pz.

Body Corpo	PA66 - GF 25	Contacts material Materiale contatti	Zinc Zinco
Voltage Tensione	32 V	Contacts finishing Finitura contatti	Tin plated Stagnato
Breaking capacity Capacità di rottura	1000 A	Operating temp. Temp. operativa	-40° C / +125° C

TIME CURRENT / TEMPI DI FUSIONE

RATED CURRENT CORRENTE NOMINALE	1.0 x I _n		1.35 x I _n		2 x I _n		3.50 x I _n		6 x I _n	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
100 A - 250 A	4 h	∞	120 s	1800 s	1 s	15 s	0.3 s	5 s	0.1 s	1 s

CODE	I. RATING I. NOM	I ² t ^①	V.D. C.D.T.	ISO CABLE SIZE ISO DIM. CAVO	COLOR COLORE
341.310	100 A	219583 A ² s	86 mV	16 mm ²	YELLOW / GIALLO
341.312	125 A	353125 A ² s	85 mV	16 mm ²	GREEN / VERDE
341.315	150 A	463167 A ² s	93 mV	25 mm ²	ORANGE / ARANCIONE
341.317	175 A	303521 A ² s	80 mV	25 mm ²	NATURAL / BIANCO
341.320	200 A	416250 A ² s	81 mV	35 mm ²	BLUE / BLU
341.322	225 A	296042 A ² s	100 mV	35 mm ²	BEIGE
341.325	250 A	637500 A ² s	80 mV	50 mm ²	PINK / ROSA

① Calculated from breaking capacity test
Calcolato dal test di capacità di rottura

All Pictures shown are for illustration purpose only. Specifications are subject to change without notice

Le immagini sono inserite a scopo illustrativo. I prodotti possono subire modifiche.



ELECTRONIC
ELECTROMECHANICAL
COMPONENTS
PARTNER & DEALER



Via Monferrato, 43
20098 San Giuliano Milanese
I T A L Y

T. +39 02 55.60.61.01
F. +39 02 55.60.71.43

www.klemi-contact.com