


All rights are strictly reserved. Reproduction or disclosure to third parties in any form whatever is not permitted without written authorization from the proprietor. A violation is punishable.



FUSE & FUSEHOLDER

341.400

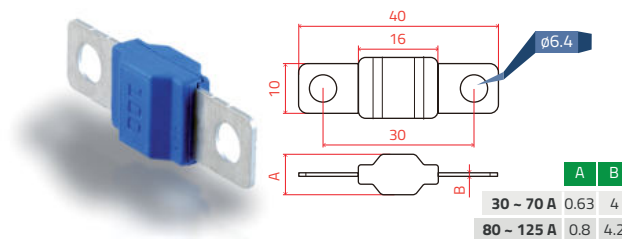

ISO 8820-5

✓ **Vibration class compliant with ISO 16750-3 test IV**
Classe di vibrazione conforme alla norma ISO 16750-3 test IV



25 pz. - 3000 pz.

Body Corpo	PA66 - GF 25	Blade material Materiale dei rivetti	Zinc Zinco
Voltage Tensione	32 V	Contacts finishing Finitura contatti	Tin plated Stagnato
Breaking capacity Capacità di rottura	2000 A	Operating temp. Temp. operativa	-40° C / +125° C

TIME CURRENT / TEMPI DI FUSIONE

RATED CURRENT CORRENTE NOMINALE	1.00 x I _n		1.50 x I _n		2 x I _n		3.00 x I _n		5 x I _n	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
30 A ~ 125 A	100 h	∞	0.50 s	10 h	3 s	100 s	0.3 s	3 s	0.1 s	1 s

CODE	I. RATING I. NOM	I ² t ^①	V.D. C.D.T.	ISO CABLE SIZE ISO DIM. CAVO	COLOR COLORE
341.410	30 A	10523 A ² s	81 mV	2.5 mm ²	ORANGE / ARANCIONE
341.414	40 A	18929 A ² s	71 mV	4.0 mm ²	GREEN / VERDE
341.415	50 A	26320 A ² s	74 mV	6.0 mm ²	RED / ROSSO
341.416	60 A	30804 A ² s	61 mV	6.0 mm ²	YELLOW / GIALLO
341.417	70 A	26728 A ² s	69 mV	10.0 mm ²	BROWN / MARRONE
341.418	80 A	56298 A ² s	66 mV	10.0 mm ²	NATURAL / BIANCO
341.420	100 A	34524 A ² s	64 mV	16.0 mm ²	BLUE / BLU
341.425	125 A	48601 A ² s	62 mV	25.0 mm ²	PINK / ROSA

① Calculated from breaking capacity test
Calcolato dal test di capacità di rottura

All Pictures shown are for illustration purpose only. Specifications are subject to change without notice

Le immagini sono inserite a scopo illustrativo. I prodotti possono subire modifiche.



ELECTRONIC
ELECTROMECHANICAL
COMPONENTS
PARTNER & DEALER



Via Monferrato, 43
20098 San Giuliano Milanese
I T A L Y

T. +39 02 55.60.61.01
F. +39 02 55.60.71.43

www.klemi-contact.com