


All rights are strictly reserved. Reproduction or disclosure to third parties in any form whatever is not permitted without written authorization from the proprietor. A violation is punishable.



FUSE & FUSEHOLDER

341.500

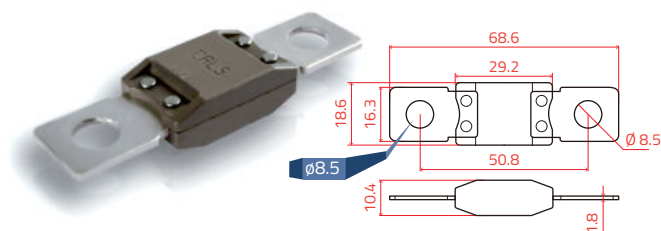

✓ **Contact material: CAL1/2: zinc alloy ~ CAL3/4/5: copper**
Materiale dei contatti: CAL1/2: lega di zinco ~ CAL3/4: rame



50 pz. - 1000 pz.

Body Corpo	PA66 - GF 30	Contacts material Materiale contatti	Steel Acciaio
Voltage Tensione	32 V	Contacts finishing Finitura contatti	Tin plated Stagnato
Breaking capacity Capacità di rottura	2000 A	Operating temp. Temp. operativa	-40° C / +125° C

TIME CURRENT / TEMPI DI FUSIONE

RATED CURRENT CORRENTE NOMINALE	CAL. 1	CAL. 2	CAL. 3	CAL. 4
400 A	70.3	82.6	-	-
500 A	-	-	107	-
600 A	4.76	4.89	17.1	58.1
700 A	-	-	-	8.39
750 A	-	-	1.59	-
800 A	1.50	1.46	-	2.28
900 A	-	-	0.730	-
1000 A	0.965	0.655	0.520	0.726
1200 A	-	0.407	0.321	0.474

CODE	I. RATING I. NOM	i ² t	V.D. C.D.T.	ISO CABLE SIZE ISO DIM. CAVO	COLOR COLORE
341.510	250 A	TBD	22 mV	16 mm ²	GREY / GRIGIO
341.520	250 A	TBD	24 mV	25 mm ²	BLACK / NERO
341.530	250 A	TBD	30 mV	50 mm ²	RED / ROSSO
341.540	250 A	TBD	35 mV	50 mm ²	BROWN / MARRONE

① Calculated from breaking capacity test
Calcolato dal test di capacità di rottura

All Pictures shown are for illustration purpose only. Specifications are subject to change without notice

Le immagini sono inserite a scopo illustrativo. I prodotti possono subire modifiche.



ELECTRONIC
ELECTROMECHANICAL
COMPONENTS
PARTNER & DEALER



Via Monferrato, 43
20098 San Giuliano Milanese
I T A L Y

T. +39 02 55.60.61.01
F. +39 02 55.60.71.43

www.klemi-contact.com