


All rights are strictly reserved. Reproduction or disclosure to third parties in any form whatever is not permitted without written authorization from the proprietor. A violation is punishable.



**Klemi Contact**  
*The connectables*

**FUSE & FUSEHOLDER**

## 528.100

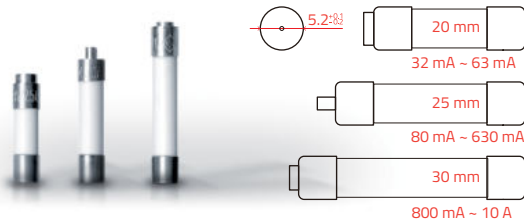

RoHS

M DIN 41557-2 ac



10 pz. [std. packaging ~ conf. standard]  
1000 pz. [ind. packaging ~ conf. industriale]

|                            |                     |   |                                     |
|----------------------------|---------------------|---|-------------------------------------|
| <b>Body</b><br>Corpo       | Ceramic<br>Ceramica | <b>Extinguishing agent</b><br>Polvere spegniarico | <input checked="" type="checkbox"/> |
| <b>Voltage</b><br>Tensione | 250 V               | <b>Contacts material</b><br>Materiale contatti    | CuZn                                |
|                            |                     | <b>Contacts finishing</b><br>Finitura contatti    | Ni                                  |

### TIME CURRENT / TEMPI DI FUSIONE

| RATED CURRENT<br>CORRENTE NOMINALE                 | 1.5 x I <sub>n</sub> |                          | 2.1 x I <sub>n</sub>    |                              | 4 x I <sub>n</sub>   |                         | 10 x I <sub>n</sub> |     |
|--|----------------------|--------------------------|-------------------------|------------------------------|----------------------|-------------------------|---------------------|-----|
|  | MIN                  | MAX                      | MIN                     | MAX                          | MIN                  | MAX                     | MIN                 | MAX |
| 32 mA ~ 100 mA<br>125 mA ~ 630 mA<br>800 mA ~ 10 A | 1 h<br>1 h<br>1 h    | 2 min<br>2 min<br>30 min | 40 ms<br>60 ms<br>60 ms | 500 ms<br>2000 ms<br>2000 ms | 5 ms<br>2 ms<br>5 ms | 30 ms<br>70 ms<br>70 ms |                     |     |

| CODE    | I. RATING<br>I. NOM | BREAKING CAPACITY<br>CAPACITÀ DI ROTTURA | V.D.<br>C.D.T. | INDICATOR COLOR<br>COLORE IDENTIFICATIVO |
|---------|---------------------|--|----------------|--|
| 528.102 | 32 mA               | 80 A                                     | 520 mV         | Black / Nero                             |
| 528.104 | 50 mA               | 80 A                                     | 500 mV         | White / Bianco                           |
| 528.105 | 63 mA               | 80 A                                     | 500 mV         | Green / Verde                            |
| 528.106 | 80 mA               | 80 A                                     | 400 mV         | Gray / Grigio                            |
| 528.107 | 100 mA              | 80 A                                     | 400 mV         | Red / Rosso                              |
| 528.108 | 125 mA              | 80 A                                     | 375 mV         | Violet / Viola                           |
| 528.109 | 160 mA              | 80 A                                     | 410 mV         | Orange / Arancione                       |
| 528.110 | 200 mA              | 80 A                                     | 280 mV         | Blue / Blu                               |
| 528.111 | 250 mA              | 1500 A                                   | 250 mV         | Yellow / Giallo                          |
| 528.112 | 315 mA              | 1500 A                                   | 220 mV         | Black / Nero                             |
| 528.113 | 400 mA              | 1500 A                                   | 400 mV         | Brown / Marrone                          |
| 528.114 | 500 mA              | 1500 A                                   | 350 mV         | White / Bianco                           |
| 528.115 | 630 mA              | 1500 A                                   | 315 mV         | Green / Verde                            |
| 528.116 | 800 mA              | 1500 A                                   | 480 mV         | Gray / Grigio                            |
| 528.117 | 1 A                 | 1500 A                                   | 360 mV         | Red / Rosso                              |
| 528.118 | 1,25 A              | 1500 A                                   | 300 mV         | Violet / Viola                           |
| 528.119 | 1,6 A               | 1500 A                                   | 250 mV         | Orange / Arancione                       |
| 528.120 | 2 A                 | 1500 A                                   | 180 mV         | Blue / Blu                               |
| 528.121 | 2,5 A               | 1500 A                                   | 180 mV         | Yellow / Giallo                          |
| 528.123 | 4 A                 | 1500 A                                   | 160 mV         | Brown / Marrone                          |
| 528.125 | 6,3 A               | 1500 A                                   | 150 mV         | Green / Verde                            |
| 528.127 | 10 A                | 1500 A                                   | 150 mV         | Red / Rosso                              |

All Pictures shown are for illustration purpose only. Specifications are subject to change without notice

Le immagini sono inserite a scopo illustrativo. I prodotti possono subire modifiche.



ELECTRONIC  
ELECTROMECHANICAL  
COMPONENTS  
PARTNER & DEALER



Via Monferrato, 43  
20098 San Giuliano Milanese  
ITALY

T. +39 02 55.60.61.01  
F. +39 02 55.60.71.43

[www.klemi-contact.com](http://www.klemi-contact.com)