

All rights are strictly reserved. Reproduction or disclosure to third parties in any form whatever is not permitted without written authorization from the proprietor. A violation is punishable.



## BASE MOUNTING FUSE HOLDERS PORTAFUSIBILI BASETTA

**Open body fuse holder with screw connection**  
Portafusibile a corpo aperto con collegamento a vite

CODE  
**HB5S01**



<b>FUSE FUSIBILE</b>	<b>CURRENT RATING CORRENTE NOM.</b>	<b>VOLTAGE RATING TENSIONE NOM.</b>	<b>FIXING FISSAGGIO</b>
<b>5 x 20</b> mm	<b>10 A</b>	<b>250 V</b>	<b>M3 x 6</b> SCREW




PC 1

Modular components  
Componenti modulari



100 pz.

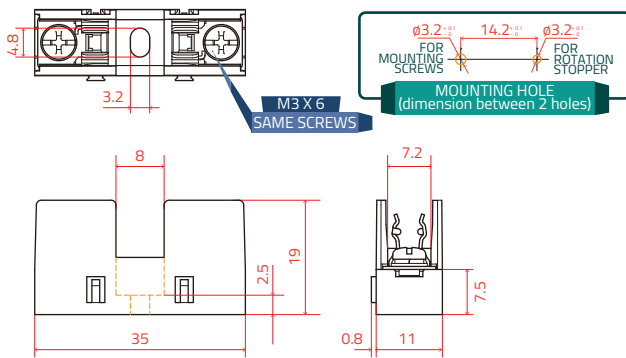

<b>Housing</b> Corpo isolante	PBT White Bianco	<b>UL 94 V-0</b>
<b>Installation terminal screw torque</b> Coppia di serraggio viti	0,5 N·m Max	
<b>Protector resistance (installed)</b> Resistenza di protezione (installata)	150 k Ω 1/4 W	
<b>Insulation resistance</b> Resistenza di isolamento	> 100 MΩ @ 500 V dc	
<b>Withstand voltage for 60 sec</b> Capacità di sovraccarico per 60 sec	ac 2000 V	

## ACCESSORIES ACCESSORI

<b>HESS01</b>	Accessories for DIN rail fuse holder, rotation block UL94V-0 / Accessori per portafusibili barra DIN blocco rotazione UL94V-0
<b>HESP01</b>	Cover for fuse holders in polycarbonat / Coperchio per portafusibili in Policarbonato

## FUSES FUSIBILI

GROUP	INT.	I. RATING I. NOM.	V. RATING TENS. NOM.	BREAKING CAPACITY CAPACITÀ DIROTTURA	APPROVAL OMOLOGAZIONE	NORM	MATERIAL MATERIALE
522.400	TT	100 mA ~ 10 A	250 V	35 A		Fabrique Norm. Norma di fabb.	Glass Vetro
522.000	T	1,6 A ~ 16 A	250 V	300 A		DIN 41.571-3	Glass + EA Vetro + PSA
UL 522.200	T	80 mA ~ 10 A	125 V - 250 V	35 A / 100 A 200 A / 10.000 A	cUL US	UL 248-14 UL 248-1	Glass Vetro
522.300	T	32 mA ~ 10 A	250 V	150 A		EN 60127-2-6	Glass Vetro
522.500	T	32 mA ~ 12,5 A	250 V	35 A ~ 125 A	cUL US	EN 60127-2-3	Glass Vetro
522.600	T	100 mA ~ 10 A	250 V	200 A		EN 60127-2-5	Cer + EA Cer + PSA
522.700	T	100 mA ~ 12,5 A	250 V	1500 A	cUL US	EN 60127-2-5	Cer / Cer + EA Cer / Cer + PSA
521.000	M	32 mA ~ 20 A	250 V	80 A ~ 300 A 1000 A		DIN 41.571-2	Glass / Glass + EA Vetro / Vetro + PSA
UL 521.000	M	100 mA ~ 7 A	250 V	35 A / 100 A 10.000 A	cUL US	UL 248-14 UL 248-1	Glass Vetro
521.500	M	630 mA ~ 16 A	250 V	1500 A		Fabrique Norm. Norma di fabb.	Cer + EA Cer + PSA
520.000	F	500 mA ~ 16 A	250 V	20 A ~ 1000 A		DIN 41.571-1	Glass + EA Vetro + PSA
520.500	F	50 mA ~ 16A	250 V	1500 A	cUL US	EN 60127-2-1 DIN 41.660	Ceramic Ceramica
520.600	F	32 A ~ 10 A	250 V	35 A / 100 A	cUL US	EN 60127-2-2 DIN 41.661	Glass Vetro
UL 520.600	F	80 mA ~ 10 A	125 V / 250 V	35 A / 100 A 200 A / 10.000 A	cUL US	UL 248-14 UL 248-1	Glass Vetro
520.100	FF	100 mA ~ 16 A	250 V	35 A / 1500 A		IEC 60127-2/A2	Glass / Cer + EA Vetro / Cer + PSA
528.100	M	32 mA ~ 10 A	250 V	80 A / 1500 A		DIN 41557-2	Cer + EA Cer + PSA
520.100-420V	FF	8 A ~ 16 A	420 V	200 A ac 300 A dc		Fabrique Norm. Norma di fabb.	Cer + EA Cer + PSA

All Pictures shown are for illustration purpose only. Specifications are subject to change without notice

Le immagini sono inserite a scopo illustrativo. I prodotti possono subire modifiche.



ELECTRONIC  
ELECTROMECHANICAL  
COMPONENTS  
PARTNER & DEALER



Via Monferrato, 43  
20098 San Giuliano Milanese  
I T A L Y

T. +39 02 55.60.61.01  
F. +39 02 55.60.71.43

[www.klemi-contact.com](http://www.klemi-contact.com)