

All rights are strictly reserved. Reproduction or disclosure to third parties in any form whatever is not permitted without written authorization from the proprietor. A violation is punishable.





## BASE MOUNTING FUSE HOLDERS PORTAFUSIBILI BASETTA

# BASE MOUNTING FUSE HOLDERS PORTAFUSIBILI A BASETTA



**Open body fuse holder with side terminals**  
Portafusibile a corpo aperto con terminali laterali

CODE  
**HB5W04**

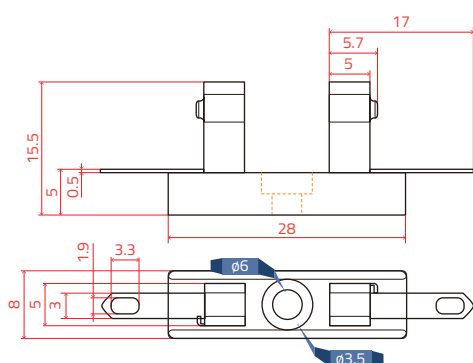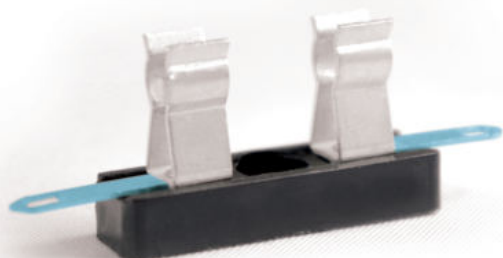

| FUSE<br>FUSIBILE     | CURRENT RATING<br>CORRENTE NOM. | VOLTAGE RATING<br>TENSIONE NOM. | TERMINAL<br>TERMINALE |
|----------------------|---------------------------------|---------------------------------|-----------------------|
| <b>5 x 20<br/>mm</b> | <b>6,3 A</b>                    | <b>250 V</b>                    | <b>SOLDERING</b>      |



PC 1

ac

✓ **Fastening with screws M3 x 4,5 mm**  
Fissaggio a vite M3 x 4,5 mm  
**Available in white color**  
Disponibile anche di colore bianco



100 pz.

**Housing**  
Corpo isolante

Thermoplastic / Black  
Termoplastica / Nero **UL 94 V-0**

**Contacts**  
Contatti

CuZn

**Plating**  
Finitura

Tinned  
Stagnato

**Pitch**  
Passo

22,5 mm

(E)

## FUSES FUSIBILI

| GROUP        | INT. | I. RATING<br>I. NOM. | V. RATING<br>TENS. NOM. | BREAKING CAPACITY<br>CAPACITÀ DI ROTTURA | APPROVAL<br>OMOLOGAZIONE | NORM                             | MATERIAL<br>MATERIALE                     |
|--------------|------|----------------------|-------------------------|------------------------------------------|--------------------------|----------------------------------|-------------------------------------------|
| 522.400      | TT   | 100 mA ~ 10 A        | 250 V                   | 35 A                                     |                          | Fabrique Norm.<br>Norma di fabb. | Glass<br>Vetro                            |
| 522.000      | T    | 1,6 A ~ 16 A         | 250 V                   | 300 A                                    |                          | DIN 41.571-3                     | Glass + EA<br>Vetro + PSA                 |
| UL 522.200   | T    | 80 mA ~ 10 A         | 125 V - 250 V           | 35 A / 100 A<br>200 A / 10.000 A         | UL US                    | UL 248-14<br>UL 248-1            | Glass<br>Vetro                            |
| 522.300      | T    | 32 mA ~ 10 A         | 250 V                   | 150 A                                    |                          | EN 60127-2-6                     | Glass<br>Vetro                            |
| 522.500      | T    | 32 mA ~ 12,5 A       | 250 V                   | 35 A ~ 125 A                             | UL US                    | EN 60127-2-3                     | Glass<br>Vetro                            |
| 522.600      | T    | 100 mA ~ 10 A        | 250 V                   | 200 A                                    |                          | EN 60127-2-5                     | Cer + EA<br>Cer + PSA                     |
| 522.700      | T    | 100 mA ~ 12,5 A      | 250 V                   | 1500 A                                   | UL US                    | EN 60127-2-5                     | Cer / Cer + EA<br>Cer / Cer + PSA         |
| 521.000      | M    | 32 mA ~ 20 A         | 250 V                   | 80 A ~ 300 A<br>1000 A                   |                          | DIN 41.571-2                     | Glass / Glass + EA<br>Vetro / Vetro + PSA |
| UL 521.000   | M    | 100 mA ~ 7 A         | 250 V                   | 35 A / 100 A<br>10.000 A                 | UL US                    | UL 248-14<br>UL 248-1            | Glass<br>Vetro                            |
| 521.500      | M    | 630 mA ~ 16 A        | 250 V                   | 1500 A                                   |                          | Fabrique Norm.<br>Norma di fabb. | Cer + EA<br>Cer + PSA                     |
| 520.000      | F    | 500 mA ~ 16 A        | 250 V                   | 20 A ~ 1000 A                            |                          | DIN 41.571-1                     | Glass + EA<br>Vetro + PSA                 |
| 520.500      | F    | 50 mA ~ 16A          | 250 V                   | 1500 A                                   | UL US                    | EN 60127-2-1<br>DIN 41.660       | Ceramic<br>Ceramica                       |
| 520.600      | F    | 32 A ~ 10 A          | 250 V                   | 35 A / 100 A                             | UL US                    | EN 60127-2-2<br>DIN 41.661       | Glass<br>Vetro                            |
| UL 520.600   | F    | 80 mA ~ 10 A         | 125 V / 250 V           | 35 A / 100 A<br>200 A / 10.000 A         | UL US                    | UL 248-14<br>UL 248-1            | Glass<br>Vetro                            |
| 520.100      | FF   | 100 mA ~ 16 A        | 250 V                   | 35 A / 1500 A                            |                          | IEC 60127-2/A2                   | Glass / Cer + EA<br>Vetro / Cer + PSA     |
| 528.100      | M    | 32 mA ~ 10 A         | 250 V                   | 80 A / 1500 A                            |                          | DIN 41557-2                      | Cer + EA<br>Cer + PSA                     |
| 520.100-420V | FF   | 8 A ~ 16 A           | 420 V                   | 200 A ac<br>300 A dc                     |                          | Fabrique Norm.<br>Norma di fabb. | Cer + EA<br>Cer + PSA                     |

All Pictures shown are for illustration purpose only. Specifications are subject to change without notice

Le immagini sono inserite a scopo illustrativo. I prodotti possono subire modifiche.



ELECTRONIC  
ELECTROMECHANICAL  
COMPONENTS  
PARTNER & DEALER



Via Monferrato, 43  
20098 San Giuliano Milanese  
I T A L Y

T. +39 02 55.60.61.01  
F. +39 02 55.60.71.43

[www.klemi-contact.com](http://www.klemi-contact.com)