

All rights are strictly reserved. Reproduction or disclosure to third parties in any form whatever is not permitted without written authorization from the proprietor. A violation is punishable.



BASE MOUNTING FUSE HOLDERS PORTAFUSIBILI BASETTA

CODE
HB8W series

FUSE
FUSIBILE

8 x 40
to
8 x 150
mm

CURRENT RATING
CORRENTE NOM.

6,3 A

VOLTAGE RATING
TENSIONE NOM.

0,5 kV
10 kV

TERMINAL
TERMINALE

SOLDERING



PC 1

ac

✓ **High voltage fuse holder**
Portafusibile per alta tensione



10 pz.


Fuse diameter
Diametro fusibile 8 mm

Weight
Peso 7,4 ~ 14,4 g


Contacts
Contatti CuZn



Open body fuse holder with side terminals
Portafusibile a corpo aperto con terminali laterali

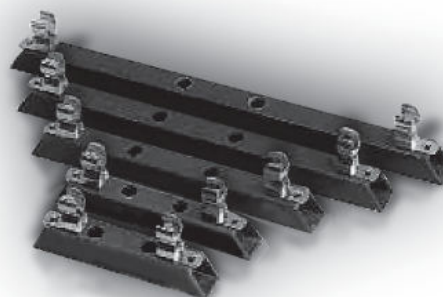

HB8W01	0.5 kV / 6.3 A	FUSE: 8 x 40 mm
HB8W02	1.2 kV / 6.3 A	FUSE: 8 x 50 mm
HB8W03	3.0 kV / 4.0 A	FUSE: 8 x 85 mm
HB8W04	6.0 kV / 6.3 A	FUSE: 8 x 120 mm
HB8W05	10 kV / 6.3 A	FUSE: 8 x 150 mm

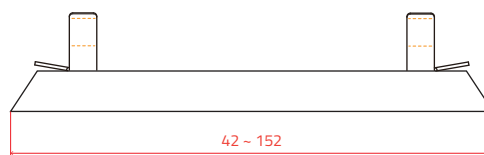

FUSES
FUSIBILI

GROUP	INT.	CODE	I. RATING I. NOM.	V. RATING TENS. NOM.	BREAKING CAPACITY CAPACITÀ DI ROTTURA	APPROVAL OMOLOGAZIONE	MATERIAL MATERIALE
8 x 40	M / F	556.600	32 mA ~ 10 A	500 V	80 A / 1500 A		Glass / Glass + EA Vetro / Vetro + PSA
8 x 50	-	557.000	32 mA ~ 6,3 A	1,2 kV	35 A		Glass / Glass + EA Vetro / Vetro + PSA
8 x 85	-	558.000	32 mA ~ 4 A	3 kV	35 A		Glass / Glass + EA Vetro / Vetro + PSA
8 x 120	-	559.000	32 mA ~ 8 A	6 kV	35 A		Glass / Glass + EA Vetro / Vetro + PSA
8 x 150	-	560.000	32 mA ~ 2 A	10 kV	35 A		Glass / Glass + EA Vetro / Vetro + PSA

All Pictures shown are for illustration purpose only. Specifications are subject to change without notice

Le immagini sono inserite a scopo illustrativo. I prodotti possono subire modifiche.



ELECTRONIC
ELECTROMECHANICAL
COMPONENTS
PARTNER & DEALER



Via Monferrato, 43
20098 San Giuliano Milanese
I T A L Y

T. +39 02 55.60.61.01
F. +39 02 55.60.71.43

www.klemi-contact.com