


KPC-CX 15 / 30 / 50 / 65

Ceramic Terminal Block
Morsetto ceramico



TECHNICAL CHARACTERISTICS CARATTERISTICHE TECNICHE

Housing Corpo isolante	Ceramic (Porcelain Steatite) Ceramica (Porcellana Steatite)
Contact Contatti	CuZn
Plating Finitura	Ni
Screws Viti	Steel / Zn Acciaio / Zn
Rated voltage ---	600 V
Max. Operating temperature Temperatura operativa max.	400°C

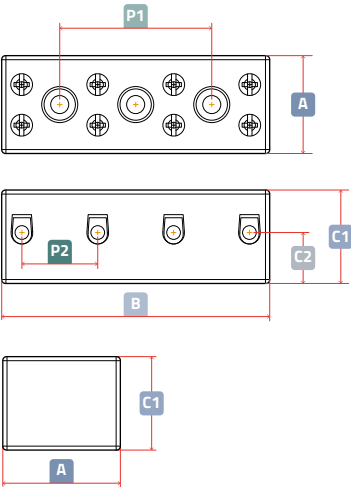

	POLES POLI	I RATING I.NOM	WIRE CROSS SECTION SEZIONE CAVO	MOUNTING HOLE	TORQUE	P2	A	C1	B	P1	C2		P/N
	1	15 A	0.82 ~ 3.31 mm² 18 ~ 12 AWG		0.34 Nm	14	19	19.5	8		10		KPC-C1-15-01
		30 A	1.31 ~ 5.26 mm² 16 ~ 10 AWG		0.5 ~ 0.59 Nm	17	22	21	9		11.5		KPC-C1-30-01
		50 A	3.31 ~ 8.37 mm² 12 ~ 8 AWG		0.9 ~ 1.04 Nm	18	24	22	12		11		KPC-C1-50-01
		65 A	5.26 ~ 13.3 mm² 10 ~ 6 AWG		1.13 ~ 1.2 Nm	20	29	25	13		12		KPC-C1-65-01
	2	15 A	0.82 ~ 3.31 mm² 18 ~ 12 AWG	M 4	0.34 Nm	14	19	19.5	22		10		KPC-C2-15-01
		30 A	1.31 ~ 5.26 mm² 16 ~ 10 AWG	M 4	0.5 ~ 0.59 Nm	17	22	21	26		11.5		KPC-C2-30-01
		50 A	3.31 ~ 8.37 mm² 12 ~ 8 AWG	M 4	0.9 ~ 1.04 Nm	18	24	22	30		11		KPC-C2-50-01
		65 A	5.26 ~ 13.3 mm² 10 ~ 6 AWG	M 5	1.13 ~ 1.2 Nm	20	29	25	33		12		KPC-C2-65-01
	3	15 A	0.82 ~ 3.31 mm² 18 ~ 12 AWG	M 4	0.34 Nm	14	19	19.5	36	14	10		KPC-C3-15-01
		30 A	1.31 ~ 5.26 mm² 16 ~ 10 AWG	M 4	0.5 ~ 0.59 Nm	17	22	21	43	17	11.5		KPC-C3-30-01
		50 A	3.31 ~ 8.37 mm² 12 ~ 8 AWG	M 4	0.9 ~ 1.04 Nm	18	24	22	48	18	11		KPC-C3-50-01
		65 A	5.26 ~ 13.3 mm² 10 ~ 6 AWG	M 5	1.13 ~ 1.2 Nm	20	29	25	53	20	12		KPC-C3-65-01
	4	15 A	0.82 ~ 3.31 mm² 18 ~ 12 AWG	M 4	0.34 Nm	14	19	19.5	50	28	10		KPC-C4-15-01
		30 A	1.31 ~ 5.26 mm² 16 ~ 10 AWG	M 4	0.5 ~ 0.59 Nm	17	22	21	60	34	11.5		KPC-C4-30-01
		50 A	3.31 ~ 8.37 mm² 12 ~ 8 AWG	M 4	0.9 ~ 1.04 Nm	18	24	22	66	36	11		KPC-C4-50-01
		65 A	5.26 ~ 13.3 mm² 10 ~ 6 AWG	M 5	1.13 ~ 1.2 Nm	20	29	25	73	40	12		KPC-C4-65-01